



 **propan**  
The Paint Specialist

®

# TENNOKOTE<sup>®</sup>

## THE ALL WEATHER SPORT COURT COATING



 **propan**  
The Paint Specialist



Certificate ID03/0111



Certificate ID11/1102954057

 [www.propanraya.com](http://www.propanraya.com)

 Propan Raya ICC

   @propanraya

 08111 381 686

# TENNOKOTE

## THE ALL WEATHER SPORT COURT COATING

**TENNOKOTE TNK - 1000 WA** adalah cat khusus lapangan olah raga, baik di dalam maupun di luar ruangan, yang terbuat dari bahan *dispersi polymer, filler* dan pigmen dalam air. Sesudah kering **TENNOKOTE TNK - 1000 WA** akan membentuk lapisan film yang fleksibel dan memiliki daya lekat yang kuat.

**TENNOKOTE TNK - 1000 WA** memiliki daya lekat yang kuat pada lapangan yang terbuat dari beton atau aspal.

**TENNOKOTE TNK - 1000 WA** is a special coat for sport court, indoors as well as outdoors, which is made from polymer dispersion, filler and pigment in with water dilution. After drying, **TENNOKOTE TNK - 1000 WA** is going to form flexible film layer with a good adhesion.

**TENNOKOTE TNK - 1000 WA** has a good adhesion on courts which is made of concrete or asphalt.

### KEUNGGULAN

### PRODUCT FEATURES :


- Bahan Dasar Air
- Tidak Berbau
- Daya lekat kuat
- Tahan sinar UV
- Anti slip
- Cepat kering
- Tidak Mengandung Mercury / Logam Berat
- Mudah Diaplikasikan
- Tersedia dalam 12 pilihan warna
- Water Based
- No Odor
- Good Adhesion
- UV Resistant
- Non Slip
- Quick Drying
- Free Mercury / Heavy Metal
- Easy to Apply
- 12 Attractive Colors

### CARA PEMAKAIAN

### APPLICATION METHOD :

- Permukaan yang akan dicat harus kering & bersih dari debu, minyak & kotoran lain yang mudah lepas.
- Gunakan cairan kimia ( *Cleanol - F* ) untuk persiapan permukaan pada beton.
- Aduk **TENNOKOTE** sampai rata sebelum aplikasi.
- Bila perlu, tambahkan sedikit air bersih ( 6-10% ) khususnya untuk lapisan dasar.
- Roll / kuaskan **TENNOKOTE** 2-3 lapis, dengan selang waktu pengecatan minimal 2 jam.
- Untuk hasil yang memuaskan, roll / kuaskan **TENNOKOTE** dengan arah saling menyilang dengan lapisan sebelumnya.
- Lindungi lapisan yang masih basah dari air hujan & terik sinar matahari yang berlebihan.
- Jangan bekerja di bawah terik matahari langsung atau pada substrat yang terlalu panas.

- The surface to be coated must be clean, dry and free from dust, grease and loose dirt.
- Use acid etch pretreatment for concrete surface.
- Stir **TENNOKOTE** thoroughly before applying.
- Pour 6-10% clean water ( only when necessary ), into the mixture especially for the first / primer coat.
- Apply 2-3 coats using brush or roller, allow 2 hours interval between coatings.
- It is recommended applying **TENNOKOTE** in cross direction against the preceding coat for optimum result.
- Protect the wet coat (within 2 hours of application) from rain, water and extreme temperature.
- Do not apply under direct sunlight exposure or onto very hot surfaces.



White



Yellow




Green



Light Blue



Dark Blue

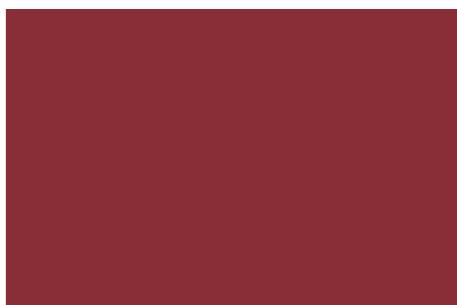

Oxide Red




Light Grey



Dark Gray



Black



Purple Passion



Razzberry



Orange Clay



Satu-satunya Cat Lapangan Olahraga  
Produk Indonesia yang Bersertifikat Internasional  
INTERNATIONAL TENNIS FEDERATION

\* Warna khusus / Special color

\* Tersedia juga warna Traffic yellow (warna khusus)  
warna-warna ini dibuat mendekati aslinya

\* Traffic yellow color is also available ( special color )

\* The colors presented are approximate color